

Machine Tube Luminaire



RL70C - 124 S

connected load
fitted with



work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

article no.

depends on the ballast
1 x compact fluorescent lamp TC-L 24 W
neutral white 4000 K
connection to a separate electronic ballast
direct power supply

borosilicate glass
approx. 1,6 kg (3.5 lbs)
lamp bracket (accessory)
direct
IP 67
I
447 mm (17.6")
293 mm (11.5")
70 mm (2.8")
A with screwed cable gland
108470001

E_{min}: 178 lx
E_m: 259 lx
E_{max}: 333 lx

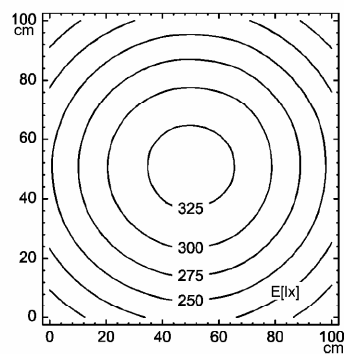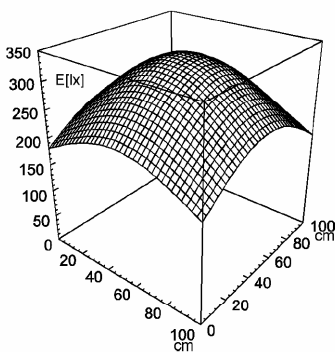

measuring conditions: d=100cm

