

machine tube luminaire #108500000-00063134



RL70CV - 118



connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

120V; 60Hz
1 x compact fluorescent lamp TC-L 18 W
neutral white 4000 K
conventional ballast
connecting terminal

acrylic clear
approx. 2,1 kg (4.6 lbs)
lamp bracket (accessory)
direct
IP 67
I
447 mm (17.6")
198 mm (7.8")
70 mm (2.8")
A with screwed cable gland (not shown)

E_{min}: 108 lx
E_m: 160 lx
E_{max}: 205 lx

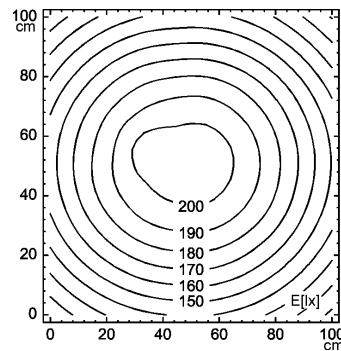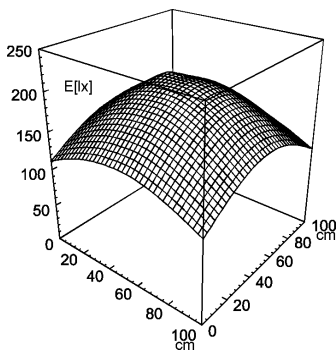

measuring conditions: d=100cm

