

Machine Tube Luminaire



RL70CV - 124



connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter
article no.

120 V; 60 Hz
1 x compact fluorescent lamp TC-L 24 W
neutral white 4000 K
conventional ballast
connecting terminal

borosilicate glass
approx. 2,9 kg (6.4 lbs)
lamp bracket (accessory)
direct
IP 67
I
600 mm (23.6")
298 mm (11.7")
70 mm (2.8")
108510001

E_{min}: 178 lx
E_m: 259 lx
E_{max}: 333 lx

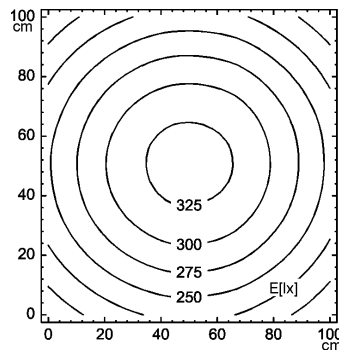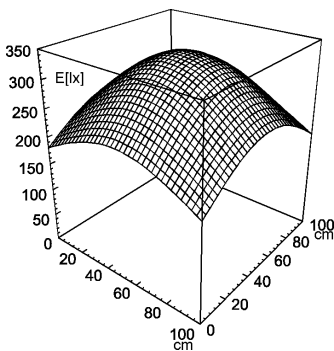

measuring conditions: d=100cm

