

Machine Tube Luminaire
RL70CE -124 108670M00




connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outsidediameter


120-277V ; 50/60Hz
1 x compact fluorescent lamp TC-L 24 W
neutral white 4000 K
electronic ballast
2.4 m (8 ft) cordset

acrylic clear
approx. 1.4 kg (3.1 lbs)
lamp bracket*
direct
IP 67
I
679 mm (26.7")
306 mm (12.0")
70 mm (2.8")
A with screwed cable gland

* All-in-one model, includes short-L brackets and 8 ft cable set

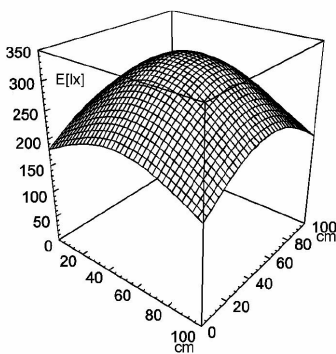

Emin: 178 lx
Em: 259 lx
Emax: 333 lx

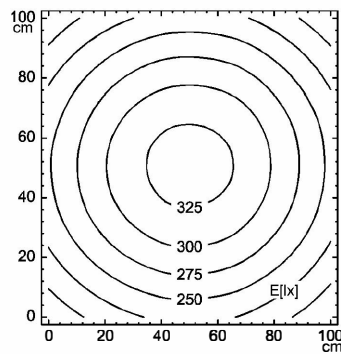

measuring conditions: d=100cm

