

Machine Tube Luminaire

RL70CE - 136 108680000-00081455





connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter

120-277V; 50/60Hz
1 x compact fluorescent lamp TC-L 36 W
neutral white 4000 K
electronic ballast
direct power supply

acrylic clear
approx. 2.0 kg (4.4 lbs)
lamp bracket (accessory)
direct
IP 67
I
788 mm (31.0")
363 mm (14.3")
70 mm (2.8")

E_{min}: 220 lx
E_m: 337 lx
E_{max}: 437 lx

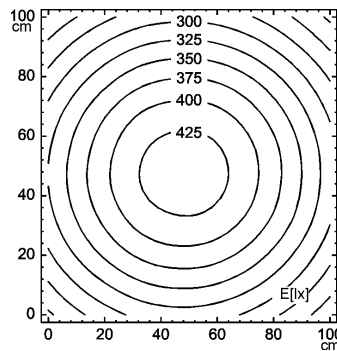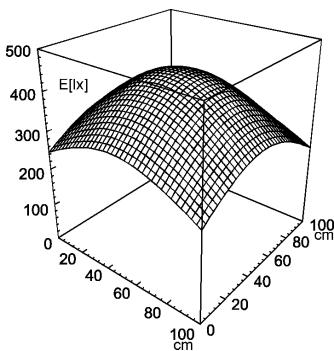

measuring conditions: d=100cm

