

# Machine Tube Luminaire

RL70CE- 136 111450000-00064046





connected load  
fitted with

work equipment  
mains lead  
luminaire body  
material  
weight (net)  
fastening  
light distribution  
system of protection  
class of protection  
total length  
light output  
outside diameter

24 V; DC  
1 x compact fluorescent lamp TC-L 36 W  
neutral white 4000 K  
electronic ballast  
connecting terminal  
  
acrylic (PMMA); clear  
approx. 1.7 kg  
lamp bracket (accessory)  
direct  
IP 67  
I  
747 mm  
364 mm  
70 mm  
C with screwed cable gland

E<sub>min</sub>: 220 lx  
E<sub>m</sub>: 337 lx  
E<sub>max</sub>: 437 lx

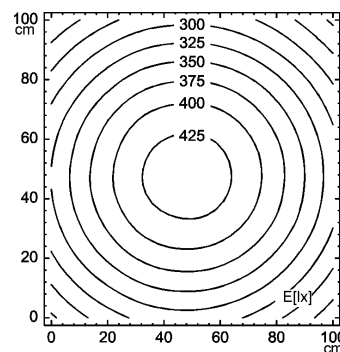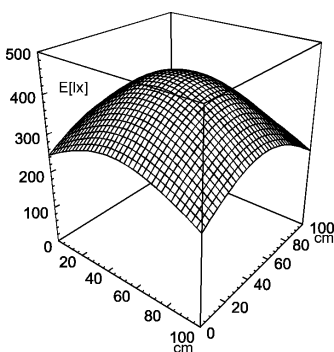

measuring conditions: d=100cm

