

Machine Tube Luminaire

RL70E-118 111650000-00063029

ENGINEER OF LIGHT.




connected load
fitted with

work equipment
mains lead
luminaire body
material
weight (net)
fastening
light distribution
system of protection
class of protection
total length
light output
outside diameter


24 V; 50/60 Hz
1 x fluorescent lamp T8 18 W
neutral white 4000 K
electronic ballast
direct power supply

acrylic clear
approx. 2.1 kg (4.6 lbs)
lamp bracket (accessory)
direct
IP 67
I

919 mm (36.2")
597 mm (23.5")
70 mm (2.8")
C with screwed cable gland

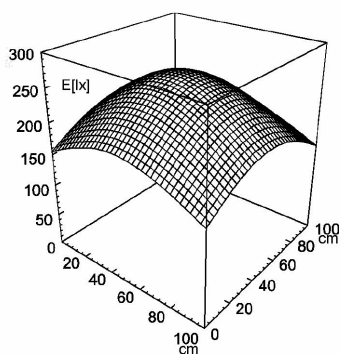

Emin: 142 lx
Em: 207 lx
Emax: 262 lx

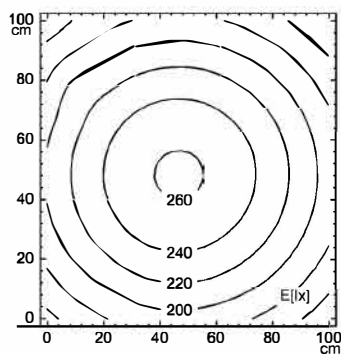

measuring conditions: d=100cm

