Workplace System Luminaire

TANEO - SARL 36 R 113575000-00743269

Waldmann
ENGINEERS OF LIGHT

fitted with	36 x Light-emitting diode light colour neutral white, 3800-4300 K, Color Rendering Index (CRI)=80
work equipment	electronic transformer
connected load	100-240 V; 50/60 Hz
power consumption	approx. 34 W
glare-free	clear prismatic lens
system of protection	IP 20
class of protection	I
technology	continuously dimmable
usage	press switch
luminaire body	
material	sectional aluminum
surface	anodized
color	aluminum colored anodized
weight (net)	approx. 1.8 kg (3.9 lb)
mains lead	approx. 4.7 m (15.4ft); with grounded 3-prong plug
design	mounted version
fastening	screw-down bracket; horizontal
dimension	658
special features	fixed connection

illuminance

measuring conditions: d=50cm

Em: 1641 lx
Emax: 4046 lx
Emin: 329 lx

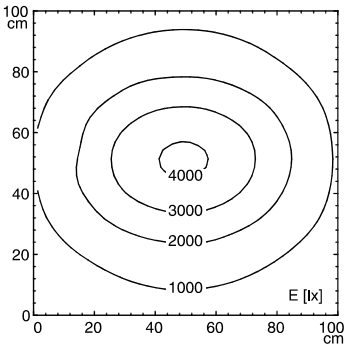

luminous intensity



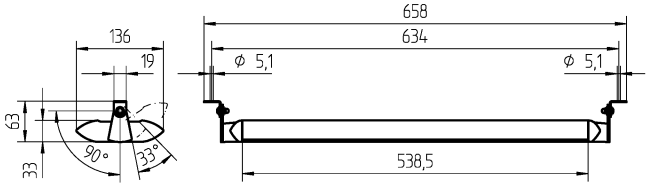

Errors and technical changes excepted. Images can vary from original.
Photometric and electrical data may vary due to component tolerances.