


114111000-00804047




light source	LED
work equipment	without
connected load	22-26 V, DC
power consumption	env. 5 W
luminous flux	approx. 550 lm
luminous efficiency	approx. 110 lm/W
light distribution	direct
beam angle	85° / 101°
color temperature	neutral white approx. 5.000 K
color rendering index (CRI)	>= 80
chromaticity tolerance LED	< 4 SDCM
glare control	screen
system of protection	IP 54
class of protection	III
technology	multi-stage switchable
operation	external
housing	aluminium/plastic; anodised, painted; aluminium colored anodised Acrylic satine
cover	
weight (net)	env. 0.193 kg, (0.43 lb)
mains lead	built-in plug; M12-A-5
design	mounted version
fastening	bracket
dimensions	A = 195mm, Cmin = 135mm, Cmax = 180mm (A = 7.67 in, Cmin = 5.31 in, Cmax = 6.88 in) 195 mm; 35 mm; 38.5 mm, (7.67 in, 1.38 in, 1.5 in)
special features	ADVANCED package



M12-A-5

illuminance

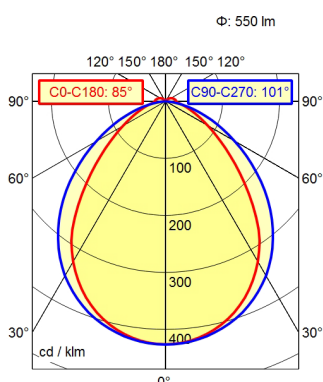

luminous intensity

