




Light source	LED
Work equipment	Electronic plug-in transformer
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	approx. 18 W
Sec. power consumption	approx. 16 W
Luminous flux	approx. 1,450 lm
Luminous efficiency ¹⁾	approx. 90 lm/W
Light type/-color	Cold white
Color temperature	approx. 5,000 K
Color rendering index	CRI ≥ 80
Light distribution	Direct; approx. 100 %
Beam angle	110 °
Chromaticity tolerance LED	< 4 SDCM
Glare control	Diffusor
Luminance (L65)	≤ 23,000 cd/m ²
UGRclass (4H 8H; EN 12464-1)	≤ 28
System of protection/Class	IP 20 [IP65]; II with plug-in power supply, III without plug-in power supply Switchable; Continuously dimmable
Technology	Push button
Operation	Aluminum; Painted; Jet black
Housing	Polycarbonate (PC); White opal
Light source cover	Tubular aluminum section; Anodized; Black
Arm	Spring
Balance of articulation joints	approx. 9.8ft (3 m); Mains plug; CEE 7/XVI; BS 1363 A; NEMA 1-15P Table clamp (accessory); Wall bracket (accessory); Screw-down flange
Mains lead	
Fastening	

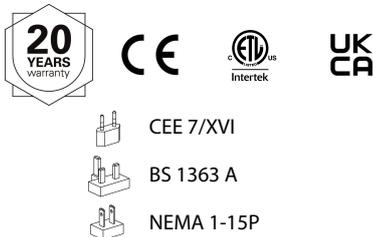

Weight without/incl. packaging	approx. 4.2 lbs (1.9 kg)
Special features	Fully spring-relieved arm

¹⁾ For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

