


Workplace System Luminaire




SAMKC 136

connected load	120 V; 60 Hz
fitted with	1 x compact fluorescent lamp TC-L 36 W neutral white 4000 K
work equipment	conventional ballast
mains lead	approx. 3.0 m (9.8 ft); shock-proof plug
luminaire body	sectional aluminium
material	painted
surface	approx. 2,9 kg (6.4 lbs)
weight (net)	screw-down bracket; vertical
fastening	switchable
technology	switch
usage	aluminiumised parabolic louvre
glare-free	I
class of protection	light grey
colour luminaire body	492 mm (19.4")
total length	118261000
article no.	

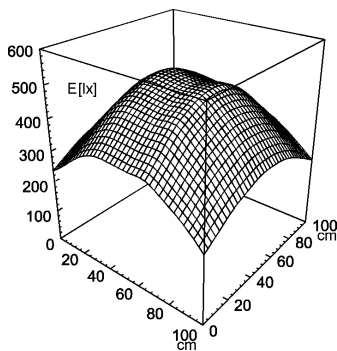

E_{min}: 214 lx
E_m: 376 lx
E_{max}: 501 lx

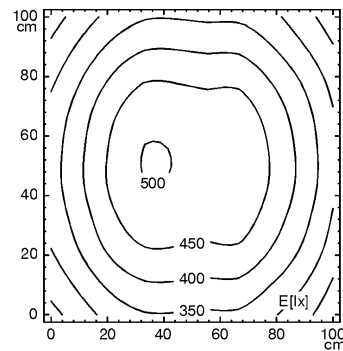

measuring conditions: d=100cm

