


# Suspended Luminaire

ATARO - DUP 454/2 #121240033

# Waldmann **W**

ENGINEER OF LIGHT.

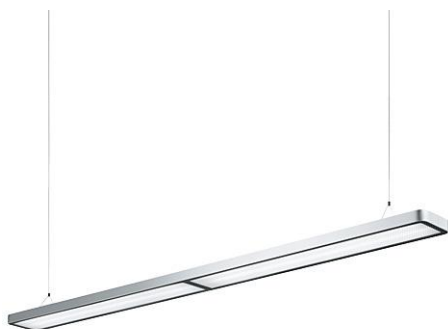

### fitted with

4 x 54W/840 T5HO linear fluorescent lamps  
color temperature 4000K  
color rendering index (CRI)=80

### work equipment

electronic ballast

### connected load

120-277V, 50/60Hz

### power consumption

approx. 238W

### light distribution

direct/indirect

### luminaire efficiency

approx. 91%

### Light yield

approx. 68 lm/W

### glare-free

acrylic microprism reflector

### technology

two-stage switchable

### usage

without switch

### luminaire body

aluminum

material

anodized

surface

silver

color

### lamp cover

clear acrylic

### weight (net)

approx. 26.25lb (11.9kg)

### mains lead

approx. 3.28ft (1m) with free stranded wire

### fastening

steel cable 1ft - 2.3 ft (0.3 - 0.7m)

### distribution of luminous intensity

