


Magnifier Luminaire




Omnivue Max ESD

connected load	120 V; 60 Hz
fitted with	3 x compact fluorescent lamp PL-S 9 W neutral white
work equipment	conventional ballast
mains lead	approx. 3.0 m (9.8 ft); shock-proof plug
design	ESD
luminaire body	
material	plastic
surface	ESD-version
tubular sections	
material	steel tube
surface	ESD-coat of lacquer
weight (net)	approx. 4,4 kg (9.7 lbs)
fastening	table base (accessory)~floor stand (accessory)~ pin mount adapter (accessory)
technology	multi-stage switchable
usage	switch
lamp cover	screen; milky
class of protection	I
colour luminaire body	black
colour of tubular sections	black
lens; dimensions	162 x 105
lens; diopters	3
special features	light output controlled with 2-way-switch
article no.	138425001

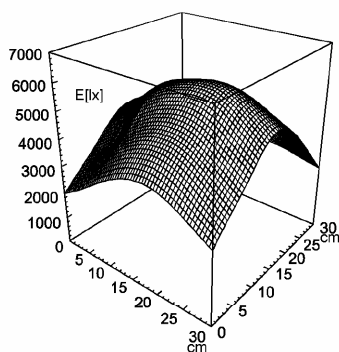

E_{min}: 1967 lx
E_m: 4252 lx
E_{max}: 6096 lx

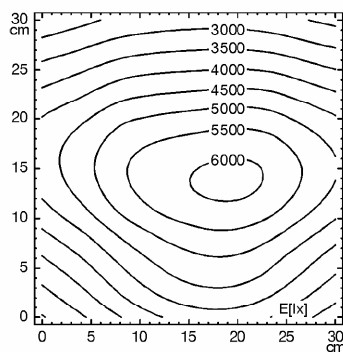

measuring conditions: d=15cm

