


fitted with
 light distribution

work equipment
 connected load
 mains lead
 luminaire body
 weight (net)
 power consumption
 usage
 lamp cover
 technology
 class of protection
 norms
 special features
 fastening

3 x LED circuits
 general lighting; indirect 3300 lm, 3000 K, 35 W
 examination lighting; direct 3300 lm, 3000 K, 35 W
 lighting for reading; direct 2400 lm, 3000 K, 26 W
 3 x LED drivers
 120 - 277 V; 50-60 Hz
 direct power supplies
 aluminum powder-coated, white
 approx. 14.5 lbs (6.6 kgs)
 approx. 98 W
 remote switch (supplied by other)
 acrylic satine
 single switchable, 3 circuit, 120-277 V
 I
 ETL/cETL
 forward asymmetric light distribution
 wall mount



light distribution

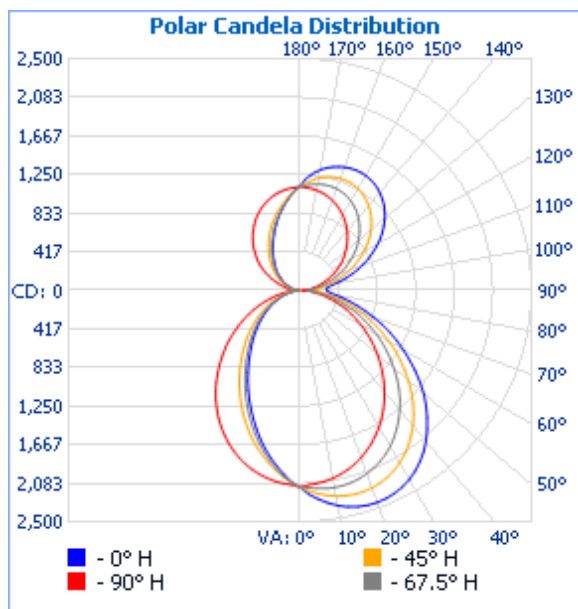

Line Voltage - Wall Switching - 3 Switches Required

