


fitted with  
 light distribution

work equipment  
 connected load  
 mains lead  
 luminaire body  
 weight (net)  
 power consumption  
 usage  
 lamp cover  
 technology  
 class of protection  
 norms  
 special features  
 fastening

3 x LED circuits  
 general lighting; indirect 3300 lm, 3500 K, 35 W  
 examination lighting; direct 3300 lm, 3500 K, 35 W  
 lighting for reading; direct 2400 lm, 3500 K, 26 W  
 3 x LED drivers  
 120 - 277 V; 50-60 Hz  
 direct power supplies  
 aluminum powder-coated, white  
 approx. 14.5 lbs (6.6 kgs)  
 approx. 96 W  
 remote switch ( supplied by other )  
 acrylic satine  
 single switchable, 3 circuit, 120-277 V  
 I  
 ETL/cETL  
 forward asymmetric light distribution  
 wall mount



light distribution

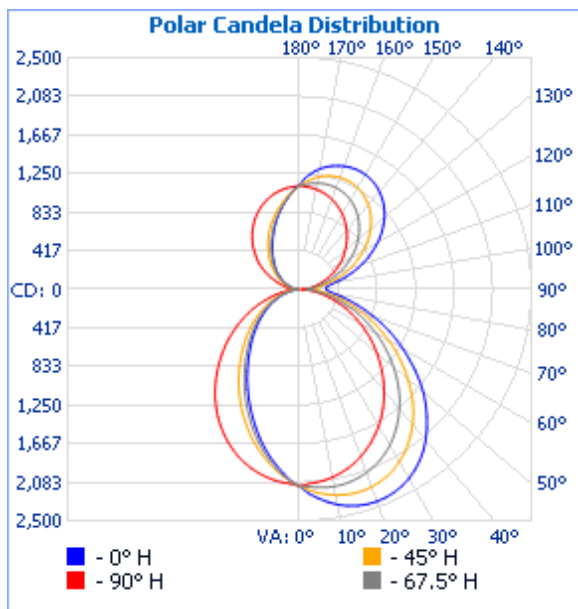

**Line Voltage - Wall Switching - 3 Switches Required**

