


DLite® vanera One 1x24 - D15389000

TECHNICAL DATA

ROOM LIGHTS

| | |
|-----------------------------|---|
| FITTED WITH | 1 x regular fluorescent lamp T5 24W - D68892000 |
| LIGHT DISTRIBUTION | general lighting indirect/direct |
| COLOR RENDERING INDEX (CRI) | > 80 |
| COLOR TEMPERATURE | approx. 3000 K |
| WORK EQUIPMENT | electronic ballast in housing, low voltage controller |
| CONNECTED LOAD | 120V; 50/60 Hz |
| MAINS LEAD | direct power supply |
| LUMINAIRE BODY | aluminum |
| POWER CONSUMPTION | approx. 30 W |
| LAMP COVER | prismatic profile, PMMA |
| CLASS OF PROTECTION | I |
| ACCESSORY | light decor foil |
| NORMS | EN 60598-1, EN 60598-2-25 |
| SPECIAL FEATURES | front- and side cover aluminum |
| FASTENING | ceiling mount, wall mount |
| GLARE-FREE | special wide beam and glare-free technique |
| SYSTEM OF PROTECTION | IP 20 |
| ORDER NUMBER | D15389000 - aluminum (anodized) |

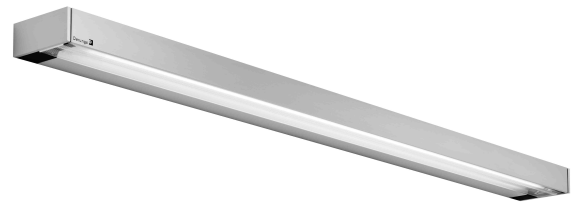

LIGHT DISTRIBUTION

TECHNICAL DRAWING

Wall mounting

