



fitted with light distribution	3 x LED module General light indirect 43 W, lighting for reading direct 10 W, examination lighting direct 33 W > 80 & > 90
color rendering index (CRI)	80 & > 90
color temperature	4000 K / 3000 K / 2700 K
work equipment	electronic converter
mains lead luminaire	direct power supply
body weight (net)	6.9 kg (15.3 lbs)
power consumption	approximately 86 W
luminous flux	8500 lm
luminous efficacy	98 lm/W
lamp cover	PMMA clear, PMMA satined
technology	3 loads, independently controllable (see below)
class of protection	I
norms	EN 60598-1, EN 60598-2-25
special features	general lighting 3000 K, lighting for reading 2700 K, examination light 4000 K, examination light CRI >90
fastening	wall mount
glare-free	freeform optic
system of protection	IP 20
order number	D15751003




Standard wiring for the three loads is as follows.


Internal low voltage controller.

Load 1 (general lighting) will be dimmable by remote momentary switch.
 Load 2 (reading lighting) will be dimmable by remote momentary switch.
 Load 3 (examination lighting) will be on/off by remote momentary switch.

LOAD 1 AND 2 INDEPENDENT (WITH DIMMING) / LOAD 3 INDEPENDENT ON/OFF (NO DIMMING)

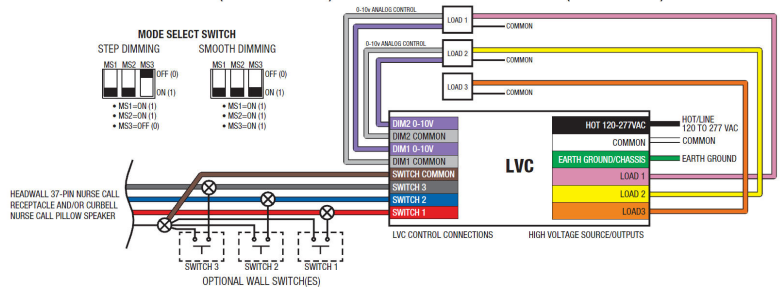

light distribution

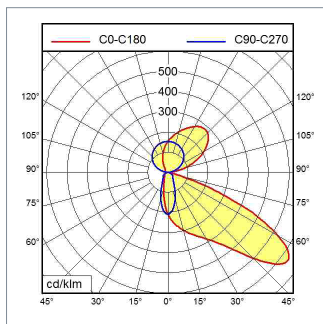

All remote switches supplied by other.

For all other wiring options, please consult factory.

dimensions in mm

