## Freestanding luminaire

VIVAA Free Wood D15949000



**ENGINEERS OF LIGHT** 





fitted with LED module - Energy efficiency category A+

color rendering index (CRI) > 80 color temperature 3000 K

work equipment electronic converter voltage 120V; 50-60 Hz cord 3 m (9.84 ft) materials wood base weight (net) 7.6 kg (16.75 lb)

Power consumption 45 W
Iuminous flux 4400 lm
Iuminous efficacy 97 lm/W
Iamp cover Acrylic (PMMA)

standards met EN 60598-1

special features direct- and indirect light, fabric lampshade,

continuously dimmable, Pull switch,


mounting floor stand glare-free prismatic screen


protection rating IP 20

order number D15949000 - black shade

## $\epsilon$

## light distribution



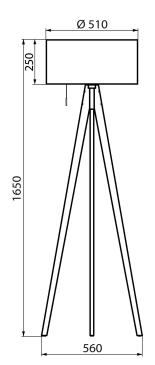

measurements in millimeters