

---


**STARLINE™ MICRO/C - MICRO/S**  
**STARLINE™ PIKO/C - PIKO/S**  
CEILING AND SUSPENDED LUMINAIRES



STARLINE MICRO and PIKO ceiling and suspended luminaires give any space a stylized and elegant ambiance while minimizing glare, making these fixtures ideal for an office, conference room or lobby setting. Both also share the added benefit of 50,000 hours of maintenance-free operation that today's premium LEDs offer.

- UGR<13 - exceptional glare control
- Choice of color temperatures (3000K, 3500K, 4000K or 2700-6500K with tunable option)
- Choice of beam angle
- Strong metal base with epoxy powder coating
- Available in black, white and gray
- STARLINE optics - micro prism downlight reflectors control the light beam direction
- Standard models compatible with 0-10V lighting controls (additional control systems also available)
- ETL/cETL approved

## STARLINE™ MICRO/C - MICRO/S ceiling and suspended luminaires

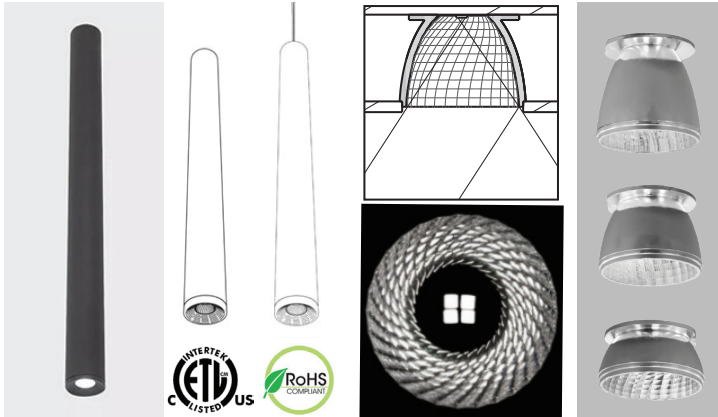

<b>Dimensions Width/Height</b>	1.8"W/19.7"H
<b>Finish</b>	epoxy polyester powder coating
<b>Lumens</b>	500 lm
<b>Wattage</b>	5W
<b>Luminaire efficiency</b>	100 lm/W
<b>Color temperature</b>	3000K/ 3500K/ 4000K/ 2700-6500K tunable
<b>CRI</b>	>80
<b>Beam angle</b>	35°/ 55°/ 75°
<b>LED service life</b>	50,000 hours
<b>Voltage</b>	120-277V
<b>Controls</b>	0-10V standard

## STARLINE™ PIKO/C - PIKO/S ceiling and suspended luminaires



<b>Dimensions Width/Height</b>	1.8"W/19.7"H
<b>Finish</b>	epoxy polyester powder coating
<b>Lumens</b>	240 lm
<b>Wattage</b>	5W
<b>Luminaire efficiency</b>	50 lm/W
<b>Color temperature</b>	3000K/ 3500K/ 4000K / 2700-6500K tunable
<b>CRI</b>	>80
<b>Beam angle</b>	60°
<b>LED service life</b>	50,000 hours
<b>Voltage</b>	120-277V
<b>Controls</b>	0-10V standard

<b>D</b>	-	<b>O</b>	-	<b>XXXX</b>	-	<b>XX</b>	-	<b>X</b>	-	<b>XX</b>	-	<b>0</b>
<b>Direct</b>		<b>Only</b>		<b>Model/Beam Angle</b>				<b>Frame Color</b>		<b>Power Supply</b>		<b>Variants</b>
				MS35 – Micro/Suspended/35deg				B: Black		A0: 0-10V Dimming		0-9
				MS55 – Micro/Suspended/55deg				W: White		L1: Lutron LDE1		
				MS75 – Micro/Suspended/75deg				G: Gray		L5: Lutron LDE5		
				PS60 – Pico/Suspended/60deg						DS: DALI Dimming (Single Color)		
				MC35 – Micro/Ceiling/35deg						DD: DALI Dimming (Tunable)		
				MC55 – Micro/Ceiling/55deg						CS: Molex CoreSync (Remote only)		
				MC75 – Micro/Ceiling/75deg								
				PC60 – Pico/Ceiling/60deg								
								<b>Color Temperature</b>				
								30 - 3000K				
								35 - 3500K				
								40 - 4000K				
								65 - 2700 - 6500K Tunable				

### Waldmann Lighting Company

9 Century Drive  
Wheeling, Illinois 60090  
www.waldmannlighting.com

V020320

Telephone (847) 520 1060  
Fax (847) 520 1730  
waldmann@waldmannlighting.com

**Waldmann** **W**  
ENGINEERS OF LIGHT