




light source  
 connected load  
 Power consumption  
 luminous flux  
 luminous efficacy  
 light distribution  
 color temperature  
 color rendering index (CRI)  
 System of protection  
 class of protection  
 technology  
 operation  
 luminaire body  
 weight (net)  
 mains supply  
 Fastening  
 fastening length  
 dimension  
 light output  
 outside diameter  
 side part  
 special features  
 max ambient temperature

LED  
 110 - 277V; 50/60Hz  
 approx. 17 W  
 approx. 1200 lm  
 approx. 71 lm/W  
 360° light output  
 neutral white, approx. 3000 K  
 >= 95  
 IP67  
 I  
 0-10V dimming  
 build in power supply  
 acrylic, opal  
 approx. 1.56 kg (3.45 lb)  
 8 ft cord  
 suspended, horizontal brackets and Canopy kit (included)  
 82" suspension Aircraft wire  
 A = 707 mm (27.83 in)  
 D = 515mm (20.28 in)  
 70 mm (2.75 in)  
 with screwed cable gland  
 suitable for wet locations  
 40C (104F)



illuminance

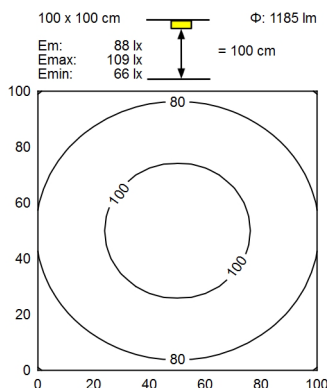

luminous intensity

