




light source	LED
connected load	110 - 277V; 50/60Hz
Power consumption	approx. 17 W
luminous flux	approx. 1200 lm
luminous efficacy	approx. 71 lm/W
light distribution	360° light output
color temperature	neutral white, approx. 3000 K
color rendering index (CRI)	>= 95
System of protection	IP67
class of protection	I
technology	0-10V dimming
operation	build in power supply
luminaire body	acrylic, opal
weight (net)	approx. 1.56 kg (3.45 lb)
mains supply	8 ft cord
Fastening	suspended, vertical bracket and canopy kit (included)
fastening length	84" suspension aircraft wire
dimension	A = 707 mm (27.83 in)
light output	D = 515mm (20.28 in)
outside diameter	70 mm (2.75 in)
side part	with screwed cable gland
special features	suitable for wet locations
max ambient temperature	40C (104F)



illuminance

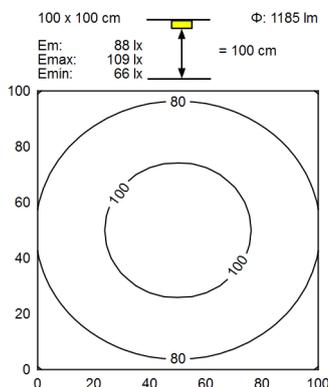

luminous intensity

