


# RL70L Series



ENGINEER OF LIGHT.













**Applications:** The RL70 Series of linear fluorescent, tubular luminaires offers an ideal solution for a variety of lighting applications. Suitable for both exterior waterproof applications and sophisticated, intricately designed interior spaces. The RL70 Series is compatible with almost all dimming control systems, and can be configured with a variety of T5, T8 and LED lamp options. Electronic ballasts can be mounted inside the luminaire or remotely. A variety of mounting options are available for endless design possibilities.

Part#		Type
Project		
Comments		Date
Prepared by		

Sample Number: R7X-17 E-SUS


R7X-

						Options				
Ballast Type	Lamping	Wiring	Voltage	Tube Color	Color Temp	Cord (ft.) or (N)one	Mounting	Decorative End Caps	Canopy	

Mounting Options:		
		<b>Pendant Ring Bracket</b> Ring: Anodized Aluminum Wire: Stainless Steel Part # 190173039-00071017
		<b>Surface Ring Bracket</b> Ring: Anodized Aluminum Screw: Stainless Steel Part # 190175019-00092090
		<b>Pendant Strap Bracket</b> Strap: Stainless Steel Wire: Stainless Steel Part # 190178029-00071035
		<b>Surface Strap Bracket</b> Strap: Stainless Steel Surface Mount: Stainless Steel Part # 190147019-00073787
		<b>Vertical Pendant Bracket</b> Bracket: Anodized Aluminum Wire: Stainless Steel Part # 190204029-00463171


**TECHNICAL SPECS:**

- 1. Voltage:** 120-277V, 50/60Hz
- 2. Lamp Technology:** 1 x T5, T5HO, T8 or LED
- 3. Integrated or Remote Ballast:** Standard Electronic or Optional Dimming
- 4. Waterproof:** IP 67 Protection
- 5. Tube:** PMMA Polymer Acrylic; Clear or Satine
- 6. Light Distribution:** 360°
- 7. Cable Gland:** Side entry located at end cap, sealed with "O" ring
- 8. Cord:** Optional, not included
- 9. Mounting:** Surface, Horizontal or Vertical Pendant available
- 10. Tandem Mounting:** Daisy chaining models available  
(Not available for vertical pendant mounting or remote ballast options)
- 11. Dimensions:** Ø70 mm (2.8 in.); length varies by lamp type
- 12. Safety:** ETL/CETL
- 13. LED Dimming:** Dependent on Ballast

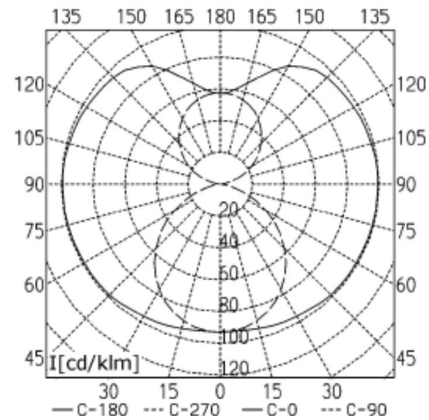

**Dimensional Layout**

- a = Length
- b = Light Opening
- c =
- d = 4.8 in. [122 mm]

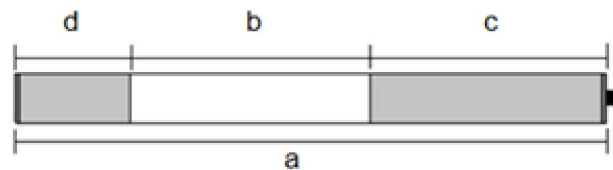

Waldmann Lighting Company  
 9 West Century Drive  
 Wheeling, IL 60090

www.waldmannlighting.com  
 Tel (800) 634-0007  
 Fax (847) 520-1730

In a continuing effort to offer the best product possible, we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on www.waldmannlighting.com are the most recent versions and supersede all other versions that exist in any other printed or electronic form. 6-2013