




fitted with
work equipment
connected load
power consumption
power factor
luminous flux
luminous efficacy
light distribution
direct ratio
beam angle
light colour
color rendering index (CRI)
glare-free UGR
system of protection
technology
usage
luminaire body
weight (net)
special features

LED
electronic ballast
100-277 V; 50/60 Hz
approx. 27 W
approx. 0,900
approx. 3500 lm
approx. 125 lm/W
direct
approx. 100 %
75°
approx. 4000 K
>80
<13
IP 20
switchable
external
metal steel sheet, powder coated; Black, White, Gray
approx. 4.3 kg (9.47 lb)
OPTICS Micro downlight reflector with complex surfaces geometry of micro facets allows precise shaping of light beam. Angles of direct light beam and light reflected from reflector are almost perfectly aligned, providing sharp cut off for full visual comfort.

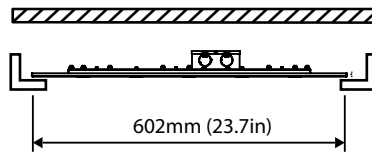

luminous intensity

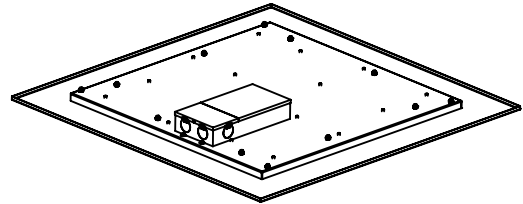