



fitted with	LED
work equipment	without
connected load	24 V, DC
power consumption	approx. 5.6 W
luminous flux	approx. 504 lm
luminous efficiency	approx. 90 lm/W
light distribution	direct
light color	neutral white, approx. 5000K
color rendering index (CRI)	> 90
system of protection	IP 54
class of protection	III
usage	without switch
luminaire body	anodized aluminum
luminaire cover	acrylic satine
weight (net)	approx. 0.4 kg (0.88 lbs)
mains supply	approx. 3.0 m (10 ft); free stranded wires
design	mounted version
fastening	screws
dimension	A = 336 mm, 13.23 in
light opening	C = 290 mm, 11.42 in
outside diameter	23 mm, 0.9 in
special features	direction of beam +/- 45° adjustable
total length	336 mm (13.23")
max ambient temperature	25°C (77°F)

light distribution

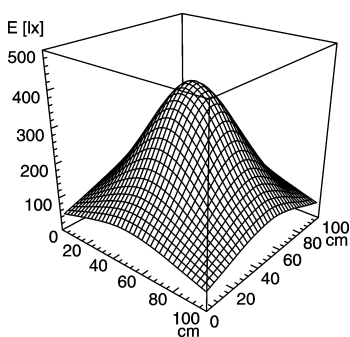

E_{min}: 58 lx
E_m: 184 lx
E_{max}: 401 lx

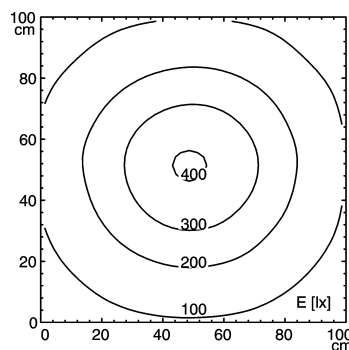

measuring conditions: d=50cm

