

protective tube luminaire



RL40E - 139



connected load	120-240V; 50/60Hz
fitted with	1 x fluorescent lamp T5 39 W neutral white 4000 K
work equipment	electronic ballast
mains lead	direct power supply
luminaire body material	PMMA polymer acrylic clear
weight (net)	approx. 0,9 kg (2.0 lbs)
fastening	different mounting options available
light distribution	direct
system of protection	IP 67
class of protection	I
total length	1303 mm (51.3")
light output	849 mm (33.4")
outside diameter	40 mm (1.6")
article no.	D with screwed cable gland 112232705

Notice

Switching cycle – In order to achieve a maximum life cycle of lamps and electronic ballasts using i.e. motion detectors PIR (Passive Infrared Sensor) or stairways' automats please consider that a minimum burning time of 15 minutes and a neutral phase of > 3 minutes will be fixed.

Outdoor use of T 5 lamps – Because of the physical capacity of the illuminant (T5) the outdoor use especially at minus temperatures should be cleared before.

E_{min}: 260 lx
E_m: 378 lx
E_{max}: 476 lx

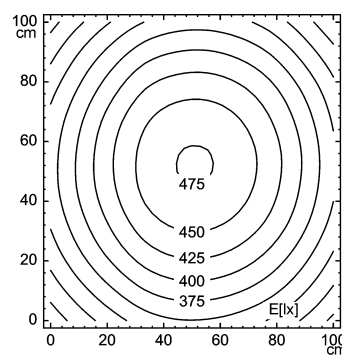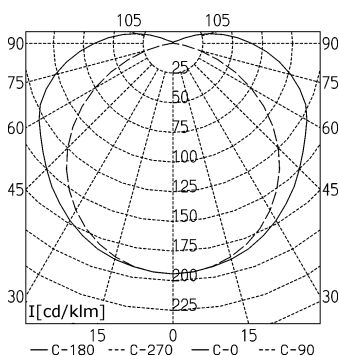

measuring conditions: d=100cm

