

ARCHITECTURAL TUBULAR LIGHTING • PEDESTAL "PATHWAY" LIGHTS



Introducing our linear fluorescent pedestal RL70EP series. These unique light columns feature a 2.75" outer diameter tube and a bolt-down (vandal-resistant) flange easily installed in both indoor and outdoor locations. Our "pathway" lights are an innovative way to illuminate unique specification requirements in public areas such as train stations or parks, and also make an ideal lighting solution to landscape architectural designs. Indoors or out, the design possibilities are endless with RL Architectural Lighting from Waldmann.


RL70EP Features:

- Waterproof (IP-67 rated) for wet locations and conditions. UL and CUL listed, and a 10-year warranty.
- Impact-resistant polycarbonate tubes range in length from 52" to 90" with a 2.75" outer diameter.
- The tubes are available in a clear or satine finish.
- The tubes house energy efficient T8 lamps which are offered in 17, 32 and 40 watts, with a rated life of 20,000 hours. A forward throw, or 360 degree distribution is available.
- The luminaires operate with integral electronic ballasts for increased energy efficiency.
- A bolt-down vandal-resistant flange is available for both indoor and outdoor specification requirements.




Waldmann Lighting

PRODUCT AVAILABILITY • RL70 SERIES PEDESTAL "PATHWAY" LIGHTS

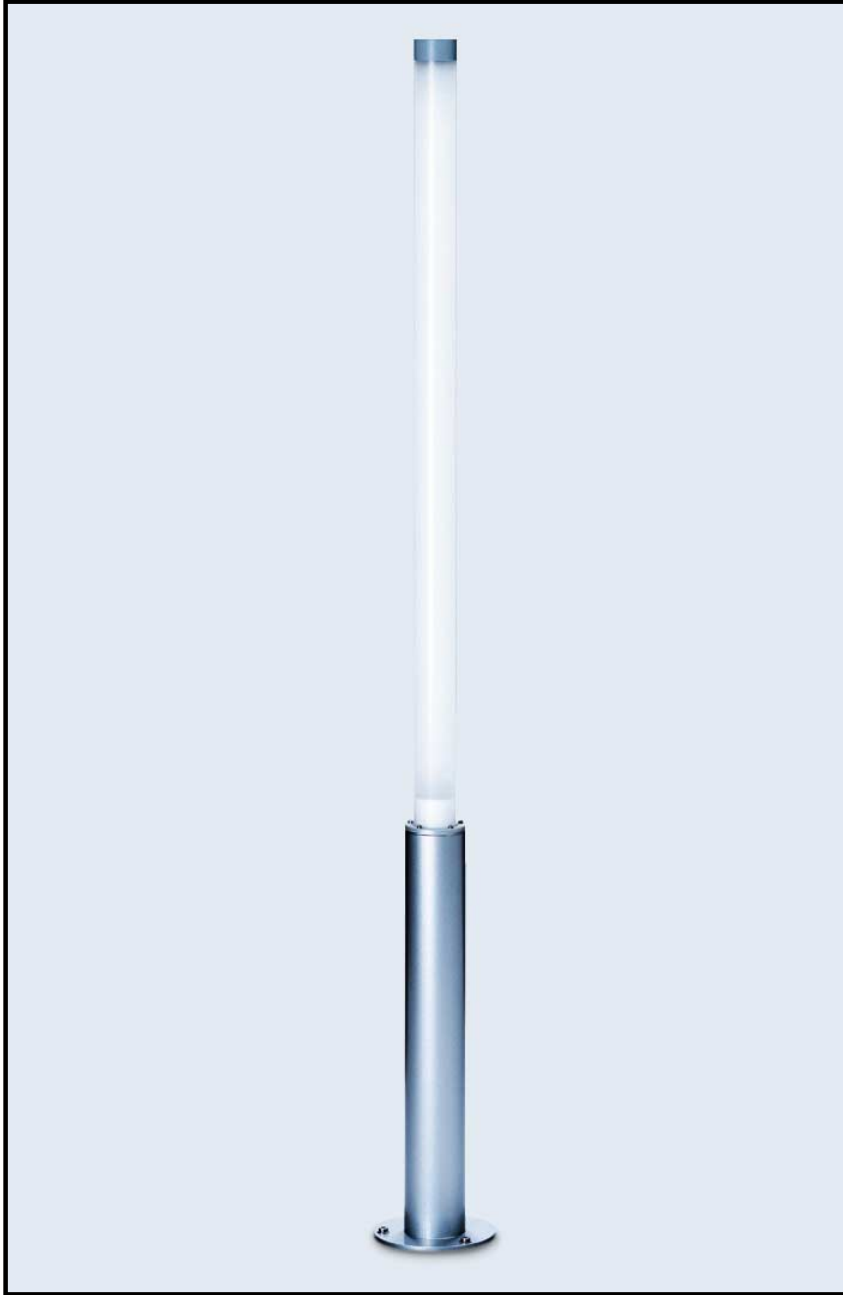

RL70EP

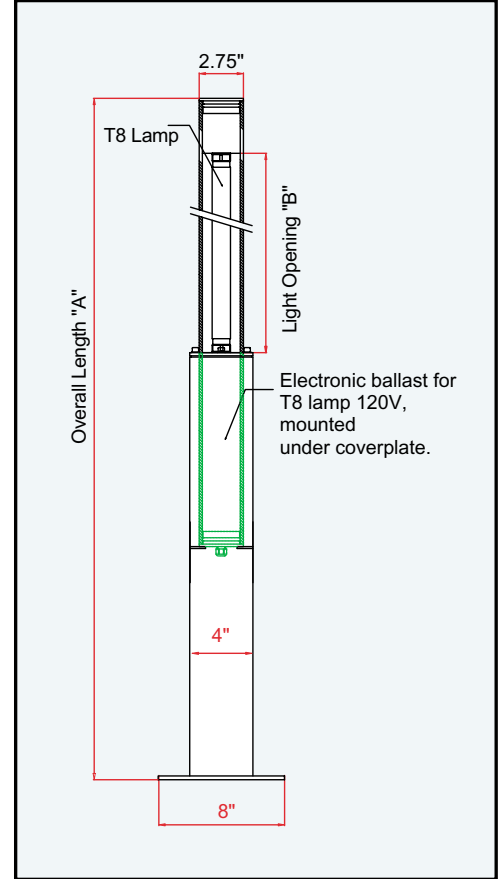

RL Series Luminaire Description Matrix

NAME/CODE	DEFINITION
RL	TUBULAR FIXTURE
70	70 mm DIAMETER TUBE (2.75")
40	40 mm DIAMETER TUBE (1.57")
E	BUILT-IN ELECTRONIC BALLAST
P	PEDESTAL BASE
117	LAMPING; E.G. 1 X 17 WATT
H	BALLAST IS INSTALLED BEHIND LAMP
D	CONTINUOUS WIRING
X	ALL-AROUND ILLUMINATION
S	SEPARATE BALLAST (NOT INCLUDED; PLEASE ORDER SEPARATELY)

PRODUCT	Part Number	Outer Tube		Wattage	Length (inches) A	Light Opening (inches) B	Lamp Type	Voltage 120-277V	Weight (lbs)
		Polycarbonate Clear	Satine						
RL70EP-132	112-140-702	X		32	77.00	47.25	T8	X	25
RL70EP-132	112-140-703		X	32	77.00	47.25	T8	X	25
RL70EP-117 X	112-142-722	X		17	52.32	22.56	T8	X	21
RL70EP-117 X	112-142-723		X	17	52.32	22.56	T8	X	21
RL70EP-132 X	112-140-722	X		32	77.00	46.57	T8	X	25
RL70EP-132 X	112-140-723		X	32	77.00	46.57	T8	X	25
RL70EP-140 X	112-143-722	X		40	89.84	58.39	T8	X	28
RL70EP-140 X	112-143-723		X	40	89.84	58.39	T8	X	28

For pricing, or additional ballast and technical information, please call **800-634-0007**



Waldmann Lighting

9 W. Century Drive, Wheeling, IL 60090

800.634.0007

www.waldmannlighting.com

Phone 847.520.1060 • Fax 847.520.1730

Email: waldmann@waldmannlighting.com

