


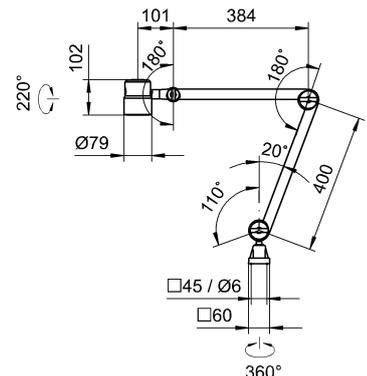


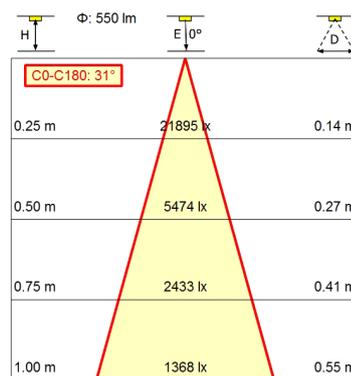

Light source	LED
Work equipment	Electronic transformer
Connected load	100 - 240 V; AC; 50 Hz; 60 Hz
Secondary tension	24 V
Power consumption	approx. 9 W
Sec. power consumption	approx. 7 W
Luminous flux	approx. 550 lm
Luminous efficiency <sup>1)</sup>	approx. 68 lm/W
Light type/-color	Cold white
Color temperature	approx. 5,000 K
Color rendering index	CRI ≥ 80
Light distribution	Wide beam; Direct; approx. 100 %
Beam angle	30 °
Chromaticity tolerance LED	< 4 SDCM
Glare control	Optics
Luminance (L65)	≤ 6,000 cd/m <sup>2</sup>
UGRclass (4H 8H; EN 12464-1)	≤ 19
System of protection/Class	102; I with plug-in power supply; III without plug-in power supply
Technology	Switchable; Continuously dimmable
Operation	Push button
Housing	Aluminum; Anodized; Black
Light source cover	Borosilicate
Arm	Aluminum tube; Anodized; Black
Balance of articulation joints	Spring
Mains lead	approx. 16.4ft (5 m); Mains plug
Fastening	Table clamp (accessory); Wall bracket (accessory); Screw-down flange
Maximum ambient temperature	40 °C
Weight without/incl. packaging	approx. 4.4 lbs (2 kg); 5.5 lbs (2.5 kg)
Packaging dimensions	approx. 28 in; 11.8 in; 4.1 in approx. 710 mm; 300 mm; 105 mm
Special features	Fully spring-relieved arm

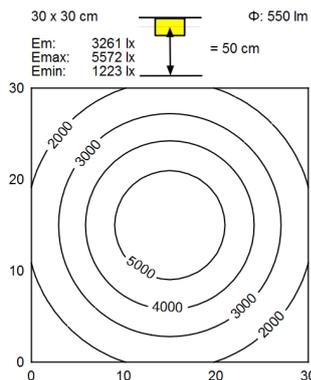

<sup>1)</sup> For luminaires with separate control gear, the luminous efficacy refers to the luminaire head without control gear

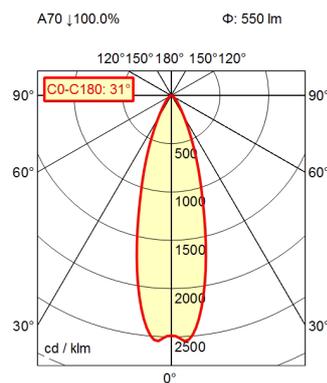